

Technical Data Sheet



Eclectic Products, Inc.
Manufacturing Facility
101 Dixie Mae Drive
Pineville, Louisiana
eclecticproducts.com
800.349.4667

ISO 9001:2015
Compliant
Quality Management
Systems

Administration Office
Eugene, Oregon
eclecticproducts.com
800.693.4667

UNITED STATES



Pint Kit
Quart Kit
Gallon Kit

Not all styles/sizes/colors available in all areas.

FAMOWOOD GLAZE COAT

HIGH BUILD EPOXY COATING

PRODUCT DESCRIPTION

FAMOWOOD GLAZE COAT HIGH BUILD EPOXY COATING is an ultra-clear, high gloss finish epoxy versatile enough to be used on just about any surface, either smooth or rough, stained or painted. This easy-to-use, 1:1 ratio is ideal for household and craft projects - just one pour equals 70 coats of varnish.

WHERE TO USE / APPLICATIONS

This ultra-clear, high gloss finishing epoxy is ideal for home improvement and craft projects.

- coat tables, clocks, game boards and furniture
- imbed coins, rocks, sea shells, flowers or any non-waxy material
- preserve pictures, photographs, posters, signs and ceramics

FEATURES AND BENEFITS

HIGH BUILD EPOXY – just one pour equals 70 coats of varnish

EASY TO USE – Easy 1:1 mixing ratio (by volume)

VERSATILE – may be used on any non-waxy material

SELF-LEVELING – minimal spreading and maintenance required

PHYSICAL PROPERTIES

| | |
|--|---|
| Natural color: | Clear |
| Tensile strength: | 450 psi |
| Tear strength: | 200 psi |
| Shear strength: | 200 psi |
| Compressive strength: | 800 psi |
| Compressive strain: | 75% |
| Elongation: | 15% |
| Shore hardness: | 85D |
| Solids content: | 100% |
| VOC: | 7.7 g/l as mixed |
| Viscosity (Side A Resin): | >1,450 |
| Viscosity (Side B Hardener): | 850-1,150 |
| Viscosity (Mixed): | 1,100 |
| Mixing ratio: | 1 to 1 by volume |
| Pot life (working time): | 30 minutes @ 70 °F / 21 °C |
| Tack free time: | 12 hours @ 70 °F / 21 °C |
| Cure time: | 72 hours (depending on temperature) |
| Weight/gallon: | Part A (Resin): 9.63 / Part B (Hardener): 7.93 @ 77 °F / 25 °C (ASTM D-1475) |
| Application temperature: | 70 to 80 °F (21 – 27 °C) |
| Service temperature: | 10 to 120 °F (-12 to 49 °C) |
| Storage temperature: | Do not store above 95 °F (35 °C); if materials are hot bring them to room temperature (77 °F / 25 °C) before mixing. |
| Food Grade: | Yes. Cured Glaze Coat provides a surface that is safe adjacent to serving or eating food. However, food should not be prepared or served with direct contact. |
| Shelf life: | 2 years (unopened - in package) |
| Coverage (Based on 1/16" thickness) | |
| Pint (0.47 L) Kit | 4.5 sq ft (0.42 m ²) |
| Quart (0.95 L) Kit | 9.0 sq ft (0.84 m ²) |
| Gallon (3.79 L) Kit | 36.0 sq ft (3.34 m ²) |

Technical Data Sheet



FAMOWOOD GLAZE COAT

HIGH BUILD EPOXY COATING

CANADA



0.94 L Kit
3.78 L Kit

Not all styles/sizes/colors available in all areas.

AUSTRALIA/NZ



0.47 L Kit
0.94 L Kit
3.78 L Kit

Not all styles/sizes/colors available in all areas.

DIRECTIONS and APPLICATION NOTES

Preparation Before Mixing:


Surface must be dry, sanded and free from dirt, dust, grease, wax, or oil. Do not apply over damp or waxed surfaces.

Cover work area with waxed paper or equal. Elevate object to be coated on supports, i.e. paper cups. Be sure object is level. Have dust cover ready to use after pour. Wear protective gloves and clothing.

Measure / Mix / Pour:

Step 1: MEASURE


Pour equal parts each of resin and hardener into separate clean, unwaxed disposable paper or plastic cups or tubs. Mix **MUST** be a one-to-one ratio (by volume), meaning equal parts resin and hardener. If possible, use a calibrated container.

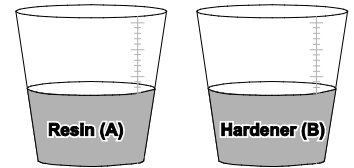

Measure*


Step 2: MIX

First mix: Pour the carefully measured Hardener (Side B) into the container with measured Resin (Side A) and thoroughly mix for six minutes. Mix with a stir stick using gentle, steady revolutions. With proper mixing, some air bubbles occur naturally and can be removed after the pour (see Step 4). It is very important to scrape all sides and the bottom of the container with your stirring stick as you mix.



First Mix*

Second mix: Pour the Resin and Hardener from first mix into a clean mixing container and thoroughly mix for an additional six minutes.



Second Mix*

* It is **EXTREMELY IMPORTANT** to follow Step 1 and Step 2 as described above. DO NOT allow mixture to sit (or it will harden), overheat and become hot to the touch.

Mixing Time

| | |
|---|---|
| 1 st Cup – Hardener into Resin | 6 minutes |
| 2 nd Cup – Resin & Hardener into new clean container | 6 minutes (or until mixed product equals 90° F) |
| <i>When the resin and hardener are first poured together, the initial mixture appears hazy.</i> | |

← This step is very **IMPORTANT** to ensure a complete mix.



NOTE: If temperature is above 70 °F, working time decreases, lower temperatures increase working time.

Step 3: Pour

Pour Glaze Coat **IMMEDIATELY** onto the center of the surface to be covered. Do not allow it to “sit”. You have about 15-20 minutes working time before product begins to harden.

Spread the mixture over the area with a plastic spreader, plastic squeegee, notched trowel or brush. If coating a large surface such as tables, bar tops, etc., a notched squeegee or trowel works well. Pour mixture on surface and spread evenly using a combing action in one direction over entire surface. Do not persist in re-spreading the mixture as it sets up, otherwise it will not self-level during the curing action.

Do not pour more than 1/8” thick in an application. Mix only as much as you can pour and spread at one time.



FAMOWOOD GLAZE COAT

HIGH BUILD EPOXY COATING

Step 4: Surface Bubbles

At initial pour, air bubbles created during the mixing process will usually rise to the surface by themselves and disappear. However, because Glaze Coat is very thick, it is usually necessary to help this process along immediately after pouring and spreading. Surface bubbles **MUST** be removed when surface is still wet, not once surface begins the curing process or else bubbles will turn into dimples once fully cured. Blow gently on the surface to force bubbles up and away. For larger areas, use a small, handheld propane torch. Keep flame 6 to 8 inches above surface. Move torch over freshly poured Glaze Coat several times until surface is bubble free. Be sure to use a waving action so the surface is only slightly warmed, allowing remaining air bubbles to disappear. Do not hold flame in one area.

Step 5: Curing

To achieve best results, apply at temperatures between 70 and 80 °F. Both Glaze Coat and the item to be coated should be approximately the same temperature.

NOTE: These curing times are to be used as guidelines only. Warmer temperatures will yield faster cure times.

| ROOM TEMP | DUST-FREE | PERIOD BETWEEN EACH ADDITIONAL COAT | FULL CURE |
|-----------|-----------|--|-----------|
| 70 °F | 8 hours | 1 – 2 coats (4 - 5 hours) 3+ coats (24 hours. No longer than 48 hours.) | 72 hours |

Step 6: Cleanup

Use acetone or alcohol for tool and work area cleanup. Glaze Coat can only be cleaned while it is still in a liquid state. After it has cured, paint remover, heat gun or sanding is required.

CAUTION: Always use plenty of soap and water to wash skin.

Additional Information:

For technical assistance, call 800.767.4667.

Glaze Coat is heat resistant to approximately 120 °F / 49 °C after fully cured. Place some type of protection such as coasters or hot pads when placing hot objects on GLAZE COAT surfaces. FAMOWOOD GLAZE COAT *is recommended* for interior use only, and should not be used on hot surfaces such as ash trays or cookware.

When applying GLAZE COAT to large surface areas such as bar tops and table tops, special attention to the mixing and application procedures are necessary due to the size of the application. Bar tops and table tops used for dining require special preparation. GLAZE COAT *is not recommended* for floors.

- Use in well-ventilated area only. Avoid breathing vapors. Wear gloves and appropriate skin protection.
- Best when used between 70 and 85 °F (21 and 29 °C).
- DO NOT change ratio and add any solvents.
- Wood surfaces: since most woods are porous, seal the surface with a thin coating of GLAZE COAT applied with a squeegee to help prevent air bubbles from forming while the main pour is in process.
- May damage finished surfaces. Avoid such contact until completely cured. Not recommended for use on polystyrene, polyethylene, polypropylene, Styrofoam™ or paper products, and any items that come into contact with food, drinking water or animals.
- Do not use on projects that will be placed in direct sunlight.



FAMOWOOD GLAZE COAT

HIGH BUILD EPOXY COATING

HEALTH and SAFETY

This product contains epoxy resin, nonyl phenol and allyl diamine resin. Before working with this product, read and become familiar with information concerning hazards, proper use and handling.

To request a hard copy of the SDS, please send an e-mail to sds@eclecticproducts.com.

LIMITED WARRANTY

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. The manufacturer will not accept liability for more than product replacement. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products LLC, P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. This warranty gives you specific legal rights, and you also have other rights, which vary from province to province.